




LED Permanent light
multicolour

- LED Permanent light (multicolour) in attractive quadratic form
- 7 different status warnings can be signalled by just one beacon (7 colours)
- The three basic colours (red/yellow/green) can be triggered using only two PLC outputs
- Easy assembly due to quick-release screws



TECHNICAL SPECIFICATIONS:

Dimensions (L x H x W):	85 mm x 85 mm x 72 mm
Housing:	PP-GF, black
Lens:	PC, transparent
Connection:	CAGE CLAMP® 0,5 - 1.5 mm²
Fixing:	Wall, base and ceiling mounting
Possible colours:	Red, yellow, green, white, blue, violet, turquoise (multicolour)
Equipment:	Eight self-sealing membranes for cable entry without tools Eight integrated M20 threads, no nuts required. Optional use of a cable gland, thread length of cable gland ≤ 9 mm (accessory)
Assembly:	Incl. snap-on fixing bracket (optional use)
Voltage/	24 V DC, I < 150 mA
Current consumption:	115-230 V AC, I < 35 mA

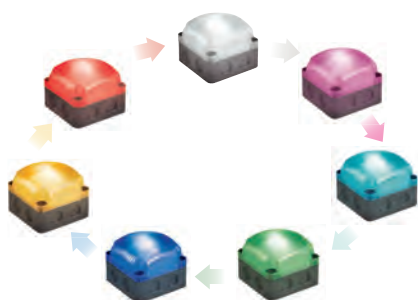

7 colours in one beacon: red,
yellow, green, clear, blue, violet,
turquoise



ORDER SPECIFICATIONS:

Voltage	24 V DC	115-230 V AC
Current consumption	< 150 mA	< 35 mA
Multicolour	853 480 55	853 480 60



ACCESSORIES:

Connector for traffic light combinations	975 853 01
Cable gland M20 x 1.5 mm, 8 mm thread length	975 853 02



ADDITIONAL INFORMATION:

Combinations made easy

The LED Beacon 853/Sounder 153 can be easily turned into a traffic light combination. Simply attach different coloured beacons or sounder together using the connector.


The eight cable entries with both self-sealing membranes and integrated M20 threads enable additional beacons to be attached to every side. There is no limit to the range of possible lighting designs that can be created.

Traffic light configurator at www.werma.com



TECHNICAL DIAGRAMS

see page 22



Individual lighting designs thanks
to eight possible cable entries

