

SHUTTLE ONE

2 MODULES

Project name: _____

Type: _____



General information

Luminaire characteristics: Nominal at 25°C

Power input: Vero: 160W or RS: 164W

Lumens: Vero: 22 800 or RS: 20 000 lm

Luminaire efficacy: Vero: 143 lm/W, RS: 122 lm/W

Source: Bridgelux® LED module, 5000K: 70CRI or 4000K: 80CRI.

Lumen maintenance: The Calculated L70 lumen maintenance of 250 000 hours is based on TM-21 lifetime calculation with >70% of initial lumens. This Calculated L70 lifetime is for the Vero products at case temperature of 85°C and nominal drive current operating condition. LM-80 (LED) / LM-79 tested.

Optics: General lighting

Body: Die-cast aluminum heat sink, aluminum fixation and ABS cover.

Electrical: High efficiency electronic power supply, 120V-277V or 347V. MTBF of 175 000 hrs at full load and 25°C ambient.

Operating temperature: -40°C to 40°C.

Dimming: Supplied standard with 0-10V dimming.

Mounting: Supplied with anchor cable.


Finish: Silver with white cover.

Weight: 19 lbs (8.5 kg)


Warranty: 5 years, refer to warranty statement.

Certification: cULus listed and DLC listed.

Ratings: IP66, suitable for damp location.

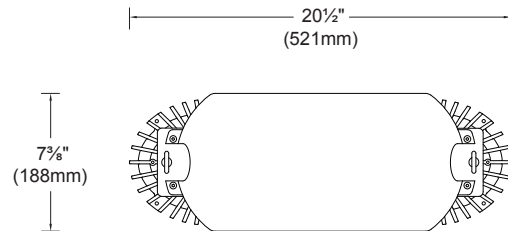

TOP VIEW

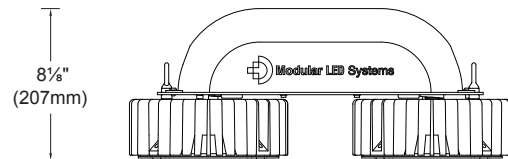

SIDE VIEW

ORDERING INFO

MODEL	VOLTAGE	FINISH	LED COLOR	OPTIC	DIMMING	LOCATION	LED	TBD
	VOLTAGE	FINISH	LED COLOR	OPTIC	DIMMING	LOCATION	LED	
	<input type="radio"/> 1 - 120-277V <input type="radio"/> 2 - 347V	<input type="radio"/> S - Silver	<input type="radio"/> A - 5000K <input type="radio"/> B - 4000K	<input type="radio"/> A - Clear <input type="radio"/> C - Frosted <input type="radio"/> K - Frosted drop lens	<input type="radio"/> A - 0-10V	<input type="radio"/> A - Indoor	<input type="radio"/> 0 - RS <input type="radio"/> 1 - VERO	

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: MARCH 16, 2015

MGD - R0



9320 Boul. St-Laurent,
 suite 100, Montréal (Québec)
 Canada H2N 1N7
 P.: 514.687.9114 F.: 514.904.1592
 www.modularledsystems.com