

442 Xenon Flash / Multi-Tone Sounder Combination (120 dB)



TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	168 mm x 211 mm x 155 mm	
Housing:	PC/ABS-Blend	
Connection:	Screw terminal 0,28-2.5 mm ²	
Cable entry:	Cable gland M20 x 1.5 mm (not included in assembly)	
Tone type and frequency:	Selectable via DIP switch, 3 tones externally triggered see table on page 284	
Voltage:	18-30 V DC	115/230 V AC
Current cons. Multi Tone Sounder:	450 mA	130/65 mA
Current consumption Flash:	127-389 mA (dependent on voltage and flash frequency)	- /15 mA (dependent on voltage and flash frequency)
Flash frequency	0,75 Hz/1 Hz	1,25 Hz/2 Hz
Flash energy	3,5 Ws	2 Ws
Housing/Flash		
red / red	442 010 55	442 010 68
red / yellow	442 030 55	442 030 68
grey / red	442 110 55	442 110 68
grey / yellow	442 130 55	442 130 68




ACCESSORIES:

Cable gland M20 x 1.5 mm	975 444 01
--------------------------	------------



TECHNICAL DIAGRAM:

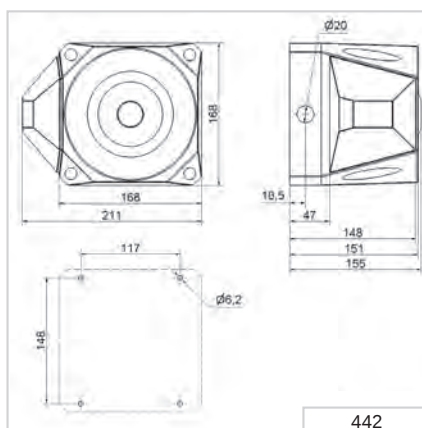

Signalisation index

Multi-Tone Sounder	10
Xenon Flash	5-6



442 XX0 55

442 XX0 68

