



**i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:**

**Dimensions (L x H x W):** 70 mm x 79,5 mm x 77 mm  
**Housing:** PC/ABS-Blend  
**Connection:** Screw terminal with wire protection, 1,0-1.5 mm<sup>2</sup> fine strand, 1,0-2.5 mm<sup>2</sup> single wire  
**Cable entry:** Cable diameter 9 mm  
**Fixing:** Wall mounting, Sound outlet facing downwards


<b>AC Version</b>			
<b>Voltage:</b>	24 V AC	42 V AC	230 V AC
<b>Current consumption:</b>	190 mA	75 mA	15 mA
<b>Order No.:</b>	<b>482 052 65</b>	<b>482 052 66</b>	<b>482 052 68</b>

<b>DC Version</b>			
<b>Voltage:</b>	12 V DC	24 V DC	
<b>Current consumption:</b>	150 mA	70 mA	
<b>Order No.:</b>	<b>482 052 54</b>	<b>482 052 55</b>	

<b>Lift Alarm (reduced inrush current)</b>			
<b>Voltage:</b>	6 V DC	12 V DC	
<b>Current consumption:</b>	80 mA	130 mA	
<b>Order No.:</b>	<b>482 347 13</b>	<b>482 347 14</b>	

Further voltages on request.

**TECHNICAL DIAGRAM:**

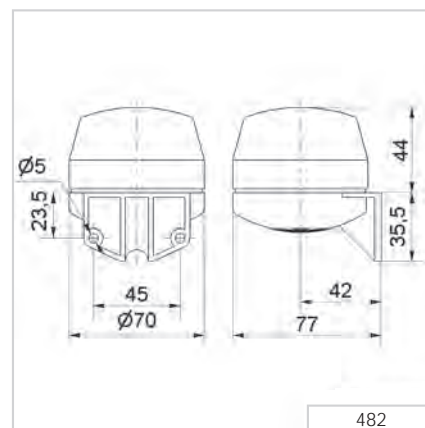

Signalisation index	
Horn	4

