

# 212/215 Xenon Flashing Beacon - Base/Bracket mounting



Flashing Beacon 212  
(Base mounting)



Flashing Beacon 215 with  
integrated mounting bracket


## TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Base mounting 212	Bracket mounting 215
Dimensions (Ø x Height):	58 mm x 97 mm	58 mm x 123 mm
Housing:		PA-GF, high impact
Lens:		PC, transparent; Ring: PC
Connection:		CAGE CLAMP® technology max. 1.5 mm <sup>2</sup>
Cable entry:	Cable diameter max. 10 mm	Cable diameter 3-6 mm
Fixing:	Base mounting with flat seal	Bracket mounting incl. cable gland M12 x 1.5 mm
Flash frequency:	C. 0.75 Hz	
Flash energy:	1 Ws	
Life duration:	4 x 10 <sup>6</sup> flashes	

Base mounting 212			
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	100 mA	20 mA	30 mA
red	<b>212 100 55</b>	<b>212 100 67</b>	<b>212 100 68</b>
yellow	<b>212 300 55</b>	<b>212 300 67</b>	<b>212 300 68</b>

Bracket mounting 215			
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	100 mA	20 mA	30 mA
red	<b>215 100 55</b>	<b>215 100 67</b>	<b>215 100 68</b>
yellow	<b>215 300 55</b>	<b>215 300 67</b>	<b>215 300 68</b>

## TECHNICAL DIAGRAMS:

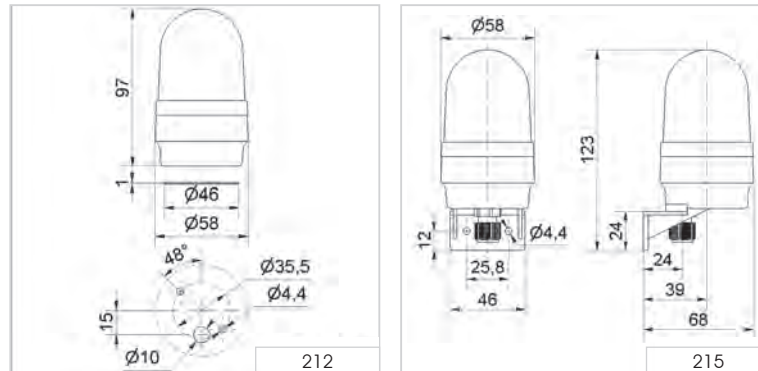

Signalisation index	
Xenon Flashing Light	4

