



Wire guard (accessory)



Clamp for tube mounting (accessory)



Mounting plate (accessory)



Bracket (accessory)


i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	209 mm x 315 mm		
Housing:	Aluminium		
Lens:	Reinforced borosilicate glass		
Mounting Plate:	VA stainless steel		
Connection:	Screw terminal max. 2.5 mm ²		
Fixing:	Base mounting, bracket mounting (accessory), tube mounting (accessory)		
Cable entry:	Cable gland M20 x 1.5 mm Cable diameter 5-13 mm		
Connection area:	Increased Safety "e"		
Installation position:	As required		
Flash energy:	C. 15 Ws		
Flash frequency:	C. 1 Hz		
Life duration:	4 x 10 ⁶ flashes		
Voltage:	24 V DC	115 V AC	230 V AC
Current consumption:	700 mA	300 mA	200 mA
Surface Temp. (dust):	85 °C	90 °C	85 °C
Explosion protection:	ⓧ II 2G Ex d e IIC T5 Gb ⓧ II 2D Ex tb IIIC 85°C-90°C Db (depending on the voltage)		
Approval:	PTB 06 ATEX 1039		
red	738 100 55	738 100 67	738 100 68
yellow	738 300 55	738 300 67	738 300 68

ACCESSORIES:

Wire guard	975 783 01
Mounting plate	975 783 02
Clamp for tube mounting 1¼"	975 783 03
Clamp for tube mounting 1½"	975 783 04
Clamp for tube mounting 2"	975 783 05
Bracket	975 783 06

TECHNICAL DIAGRAM:

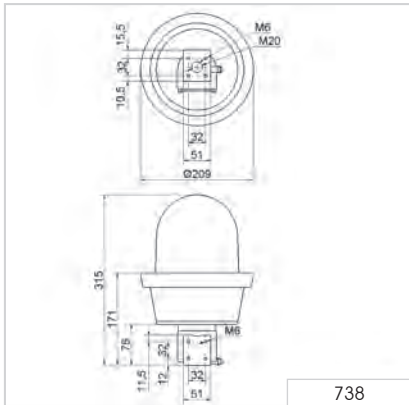

Signalisation index	
Xenon Flashing Light	9

2 G
Zone 1 + 2

2 D
Zone 21 + 22

4,4 kg

+40°C
-20°C

15 Ws
