



Surface housing (accessory)

Surface housing (triple) for
2 beacons and 1 audible element
(not included in assembly)**TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:**

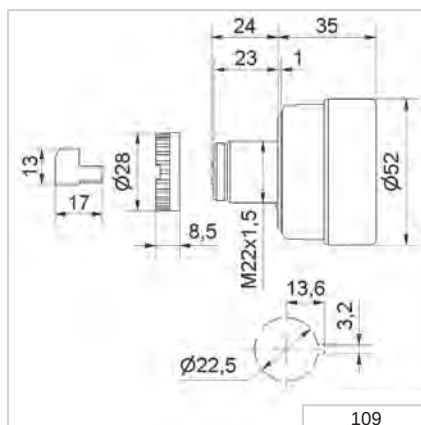
Dimensions (Ø x Height):	52 mm x 35 mm (Protrusion from panel)		
Housing:	PC/ABS-Blend; Cap: PC		
Tone frequency:	C. 2,100 Hz		
Tone type:	Continuous tone or pulse tone with approx. 1 Hz		
Fixing:	Installation mounting for Ø 22,5 mm (M22) with anti-twist device		
Connection:	Connector plug with screw terminal max. 1.5 mm ²		
Life duration:	> 5,000 hrs		

Voltage:	24 V AC/DC	115 V AC/DC	230 V AC
Current consumption:	25 mA	25 mA	25 mA
Continuous tone	109 000 75	109 000 77	109 000 68
Pulse tone	109 010 75	109 010 77	109 010 68

**ACCESSORIES:**

Bracket with protective cap (IP54), only 24 V	975 109 01 (see picture on page 244)
Single surface housing	975 109 02
Double surface housing	975 109 03
Triple surface housing	975 109 04

Assembly comprises of only the surface housing. Beacons 800-802 or 815-817 have to be ordered additionally.

**TECHNICAL DIAGRAM:****Signalisation index**

Continuous tone	3
Pulse tone	4

