



Cap (accessory)



Zener Barrier (accessory)


i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	43 mm x 13 mm (Protrusion from panel)			
Housing:	PC/ABS-Blend			
Connection:	Spades 6.3 x 0.8 mm			
Tone frequency:	C. 2,400 Hz			
Duty cycle:	100 % ED			
Explosion protection:	Ex II 2G Ex ib IIC T4 / T5 / T6 Gb			
Approval:	DMT 98 ATEX E 005 X			
Maximum values of the Zener barrier:	Ui: 40 V DC, Ii: 660 mA			
Minimum values of the Zener barrier:	For 24 V DC 15 V DC/ 20 mA			
Maximum Input Power Pi:	Temp.-classes	Max. surrounding temperature		
		+ 40°C	+ 50°C	+ 60°C
	T4	Pi= 1,3 W	Pi= 1,2 W	Pi= 1,0 W
	T5	Pi= 0,82 W	Pi= 0,66 W	Pi= 0,52 W
T6	Pi= 0,6 W	Pi= 0,45 W	Pi= 0,3 W	
Voltage:	24 V DC			
Current consumption:	20 mA			
Order No.:	718 000 55			

ACCESSORIES:

PC/ABS-Blend Cap (IP 43)	975 118 00
Zener Barrier	975 714 01

TECHNICAL DIAGRAM:

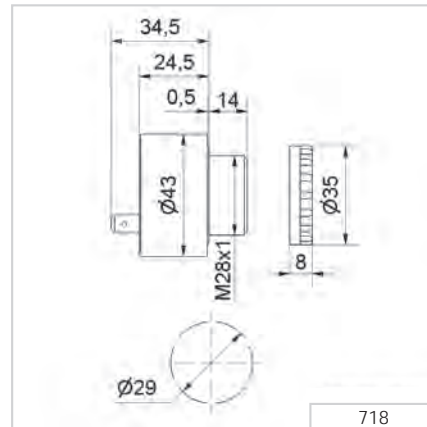

Signalisation index

Continuous tone 4

CE Ex 2 G Zone 1 + 2 50 g IP30 with cap IP43 +60°C 0°C 90 dB

