

Explosion Proof Non Contact Safety Interlock Switches





CM1-Ex STAINLESS STEEL 316

Ex II 2G Ex mb IIC T6 Gb

Ex II 2D Ex mb IIIC T80 Db IP67*

Zones 1, 21, 2, 22 Gas and Dust

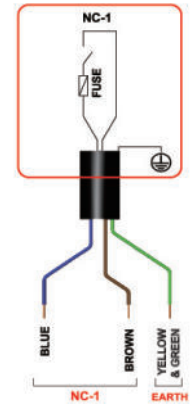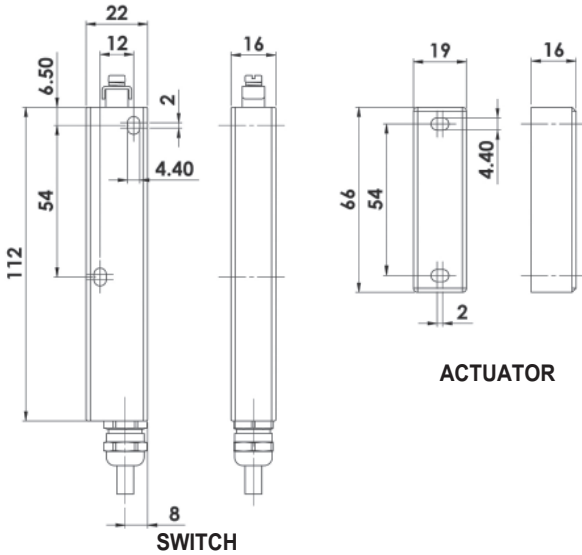



| SALES NUMBER | TYPE ZONES 1,21,2,22 | BODY HOUSING | CABLE LENGTH 6mm OD | CIRCUITS | ELECTRICAL RATING NORMALLY CLOSED CIRCUITS (Actuator Present) NC |
|--------------|-------------------------|--------------|------------------------|----------|---|
| 901101 | CM1-Ex | S/Steel | 5M | 1NC | 230Vac/24Vdc 2A Max. |
| 901102 | CM1-Ex | S/Steel | 10M | 1NC | INTERNALLY FUSED |

CM2-Ex STAINLESS STEEL 316

Ex II 2G Ex mb IIC T6 Gb

Ex II 2D Ex mb IIIC T80 Db IP67*

Zones 1, 21, 2, 22 Gas and Dust

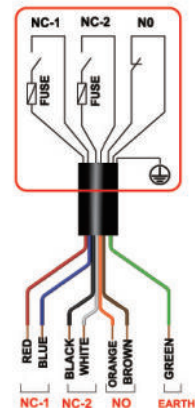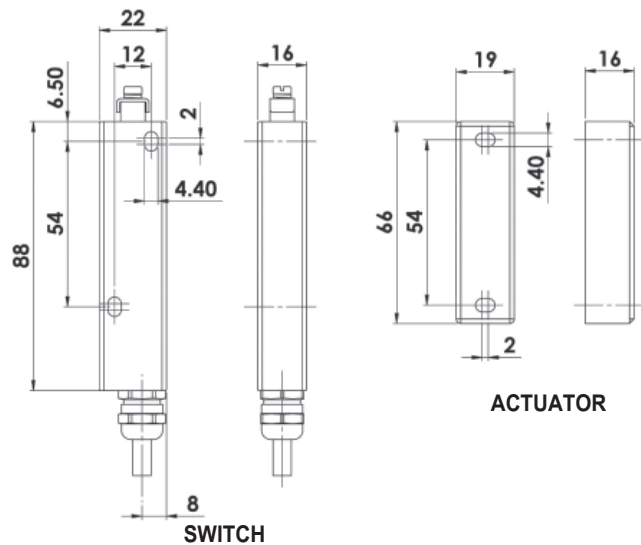

| SALES NUMBER | TYPE ZONES 1,21,2,22 | BODY HOUSING | CABLE LENGTH 6mm OD | CIRCUITS | ELECTRICAL RATING NORMALLY CLOSED CIRCUITS (Actuator Present) NC | ELECTRICAL RATING NORMALLY OPEN CIRCUITS (Actuator Present) NO |
|--------------|-------------------------|--------------|------------------------|----------|---|---|
| 902103 | CM2-Ex | S/Steel | 5M | 1NC | 230Vac/24Vdc 1A Max. | |
| 902104 | CM2-Ex | S/Steel | 10M | 1NC | INTERNALLY FUSED | |
| 902105 | CM2-Ex | S/Steel | 5M | 2NC 1NO | 230Vac/24Vdc 0.6A Max. | 230Vac/24Vdc |
| 902106 | CM2-Ex | S/Steel | 10M | 2NC 1NO | INTERNALLY FUSED | 200mA. Max. |

*Product is fully encapsulated which is considered to provide ingress protection to at least IP67.

Explosion Proof Non Contact Safety Interlock Switches




CM3-Ex STAINLESS STEEL 316

Ex II 2G Ex mb IIC T6 Gb


Ex II 2D Ex mb IIIC T80 Db IP67*

Zones 1, 21, 2, 22 Gas and Dust

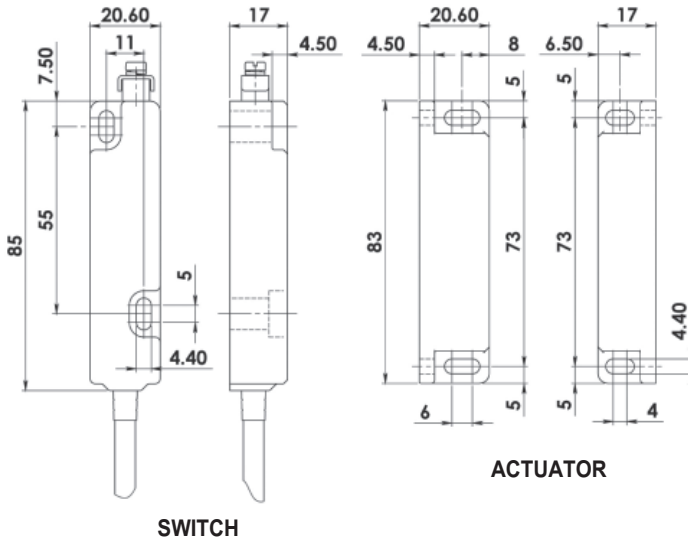

SWITCH

ACTUATOR

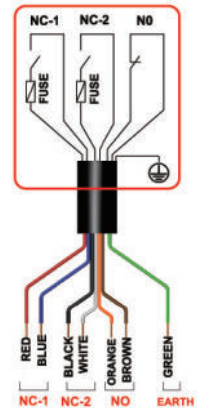

| SALES NUMBER | TYPE ZONES 1,21,2,22 | BODY HOUSING | CABLE LENGTH 6mm OD | CIRCUITS | ELECTRICAL RATING | ELECTRICAL RATING |
|--------------|-------------------------|--------------|------------------------|----------|--|--|
| | | | | | NORMALLY CLOSED CIRCUITS (Actuator Present) NC | NORMALLY OPEN CIRCUITS (Actuator Present) NO |
| 903101 | CM3-Ex | S/Steel | 5M | 2NC 1NO | 230Vac/24Vdc 0.6A Max. | 230Vac/24Vdc |
| 903102 | CM3-Ex | S/Steel | 10M | 2NC 1NO | INTERNALLY FUSED | 200mA. Max. |