

## EN 60529 Degree of Protection IP20 (IP68 Upon Request)

### COMPACT DESIGN

#### Materials of Construction:


- Cast aluminum body painted black
- Cast aluminum treadle and base plate with nonskid base pad
- Internal strain relief clamp accepts a wide range of cable sizes

#### Features & Benefits:

- Single stage momentary contact
- Clean lines and compact design with a modest cost
- Versatility of this model makes it ideal for O.E.M. devices

#### Options:

- Special threaded conduit entry available to the O.E.M. on special order. (Dual / Metric)
- Custom cordsets and modifications are available to the O.E.M. on special order
- Also available in Solid State (Hall Effect) format on special order. Contact office for specifications
- AirVal models available (See "Classic - Pneumatic AirVal" on page 71 for details)
- Heavy gauge steel guard available (See "Accessories - Guards" on pages 94 & 95 for details)

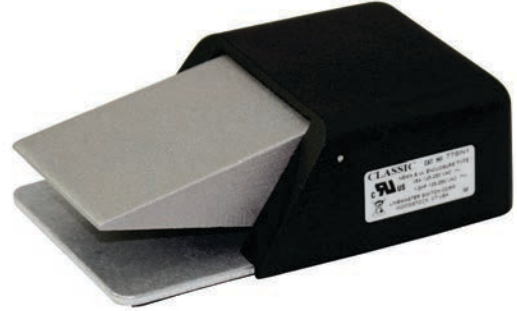

Size (HxWxD):	1.68 x 3.25 x 5.39 In.
Weight:	1.13 lbs.

For Dimension Drawings visit [www.linemaster.com](http://www.linemaster.com) and click on Line Drawings located under the Guides & Literature Tab

<b>⚠ WARNING SEE PRODUCT WARNING ON PAGE 103</b> SPECIFICATIONS (Special variations are available to the O.E.M. on special order on the models listed below)						
AGENCY APPROVALS	EN 60529 Degree of Protection	CATALOG NUMBER	DESCRIPTION	CIRCUIT	FORM	ELECTRICAL RATINGS
	IP20	77SN1	Momentary	SPDT	C	15 A 125-250 VAC 1/2 H.P. 125-250 VAC