



Optical-audible combinations

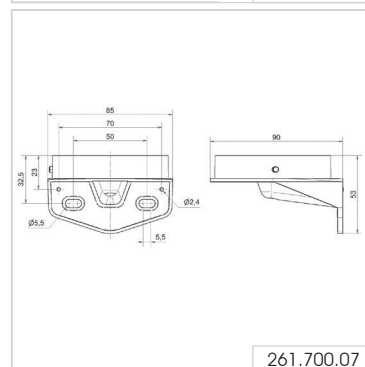

115-230 V AC	
Twin<i>LIGHT</i>	Twin<i>FLASH</i>
Order No.	Order No.
461 110 60	461 120 60
461 210 60	461 220 60
461 310 60	461 320 60
461 410 60	461 420 60
461 510 60	461 520 60

Base mounting  Order no. 261 700 01	Base mounting with cable gland  Order no. 261 700 02	Tube mounting  Order no. 261 700 05	Bracket mounting with cable gland  Order no. 261 700 06	Bracket mounting  Order no. 261 700 07	Horn  Order no. 261 700 03
--	---	--	--	---	--

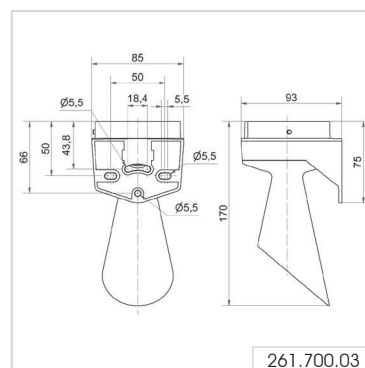



Horn



Bracket mounting with cable gland



Tube mounting

EvoSIGNAL Midi - Combinations

① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	85 mm x 130 mm
Housing:	PC/ABS
Lens:	PC, transparent
Fixing:	Base/Tube/Wall mounting
Cable entry:	Cable diameter 8-12 mm
Connection:	Push-In terminal max. 1.5 mm ²
Tone type:	Multi-tone, 10 tones
Flashing/Blinking frequency:	1 Hz

TwinLIGHT

Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 345 mA	≤ 170 mA
red	461 110 70	461 110 60
green	461 210 70	461 210 60
yellow	461 310 70	461 310 60
white	461 410 70	461 410 60
blue	461 510 70	461 510 60


TwinFLASH

Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 110 mA	≤ 215 mA
red	461 120 70	461 120 60
green	461 220 70	461 220 60
yellow	461 320 70	461 320 60
white	461 420 70	461 420 60
blue	461 520 70	461 520 60

✳ ACCESSORIES:

Base mounting	261 700 01
Base mounting with cable gland	261 700 02
Tube mounting	261 700 05
Bracket mounting with cable gland	261 700 07
Bracket mounting	261 700 06
Horn	261 700 08

↔ TECHNICAL DIAGRAM:

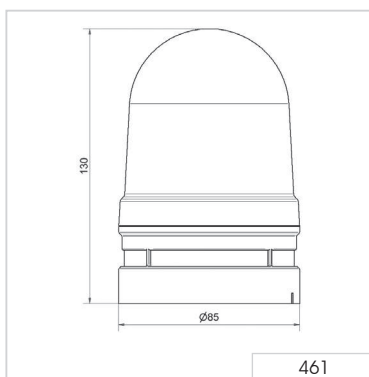

Signalisation index	
TwinLIGHT	6
TwinFLASH	8
Continuous	7
Pulse	8

