

141 Electronic Multi-Tone Sounder (110 dB)




① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:		
Dimensions (L x H x W):	165 mm x 136 mm x 132 mm	
Housing:	PC/ABS-Blend	
Connection:	Screw terminal 0.5 - 2.5 mm ²	
Cable entry:	Cable gland M20 x 1.5 mm (not included in assembly)	
Tone types and frequencies:	Selectable via DIP switch	
Voltage:	9-60 V DC	115/230 V AC
Current consumption:	120 mA (24V)	22 mA (230 V)
red	141 000 55	141 000 68
grey	141 100 55	141 100 68

✂ ACCESSORIES:	
Cable gland M20 x 1.5 mm	975 444 01

🎵 TONE TYPES AND FREQUENCIES:	
For further details see www.werma.com .	

↔ TECHNICAL DIAGRAM:	
----------------------	--

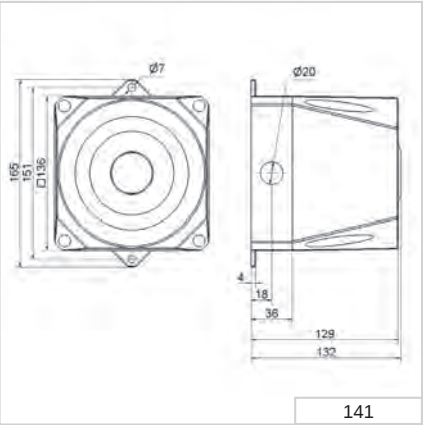

Signalisation index	
Multi-tone sounder	8

