

# 239 LED Installation Beacon (Multicolour)



LED Installation Beacon  
(Multicolour)



LED Installation Beacon  
(Multicolour) with raised lens



Five colours in one beacon:  
red, yellow, green, white and blue

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	50 mm x 22 mm (Protrusion from panel) 50 mm x 32 mm (Protrusion from panel)
Housing:	PC/ABS-Blend, black
Lens:	PC, transparent
Fixing:	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm)
Connection:	Screw terminal max. 0.5 mm <sup>2</sup> (239 480 55) Push In max. 1.5 mm <sup>2</sup> (239 482 55)
Colour options:	Red, yellow, green, white, blue (multicolour)
Life duration:	Up to 50,000 hrs
Nut and seal included in assembly.	
Voltage:	24 V DC
Current consumption:	Max. 75 mA
Low lens, clear	<b>239 480 55</b>
Raised lens, opaque	<b>239 482 55</b>



## ! ADDITIONAL INFORMATION:

The LED beacon 239 is suitable for applications on machines or in control panels.

The LED installation beacon (multicolour) can be single-hole mounted with ease thanks to its M22 installation dimensions.


X1	X2	X3	X4	X5	Colour
		24V DC	nc	COM	RD
	24V DC		nc	COM	GN
	24V DC	24V DC	nc	COM	YE
24V DC			nc	COM	BU
24V DC	24V DC	24V DC	nc	COM	WH

## ↔ TECHNICAL DIAGRAM:

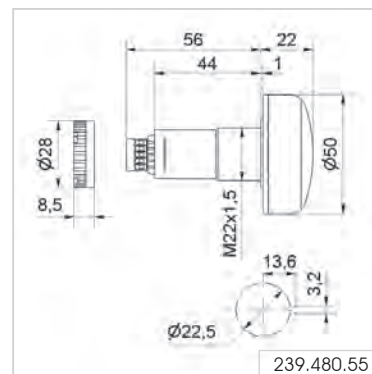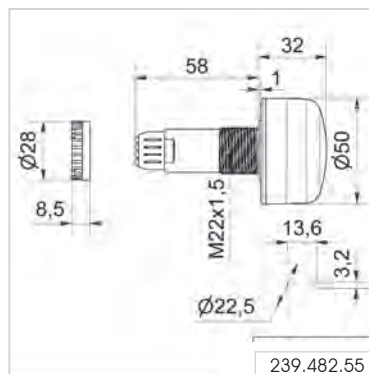

### Signalisation index

LED Permanent Light (multicolour) 3



PLC



# 239 LED Installation Beacon (Multicolour) for AS-Interface




Five colours in one beacon:  
red, yellow, green, white and blue

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	50 mm x 22 mm (Protrusion from panel)
Housing:	PC/ABS-Blend, black
Lens:	PC, transparent
Fixing:	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm) with anti-twist device
Connection:	Screw terminal with wire protection max. 1.5 mm <sup>2</sup>
Power supply AS-Interface:	Via bus conduction
Operating voltage:	25 V ... 31.6 V according to the AS-Interface specification
Current consumption:	≤ 100 mA
Specification:	V 3.0
IO-Code:	8 <sub>HEX</sub>
ID-Code:	A <sub>HEX</sub>
ID2-Code:	E <sub>HEX</sub>
Colour options:	Red, yellow, green, white, blue
Life duration:	Up to 50,000 hrs
Nut and seal included in assembly.	
LED Installation Beacon (multicolour) for AS-Interface	<b>239 780 55</b>

## ↔ TECHNICAL DIAGRAM:

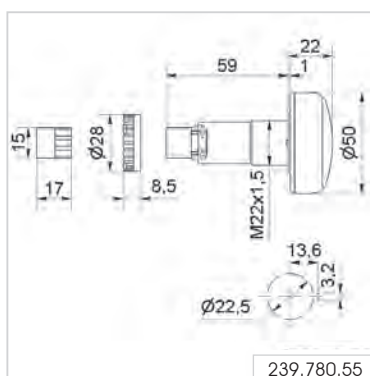


### Signalisation index

LED Permanent Light (multicolour)   3



Approval No. 2001



PLC