

# 430/432 LED Permanent Light/Multi-Tone Sounder Combination



LED Permanent Light in combination with Multi-Tone Sounder



Quick and simple wall mounting without additional accessories thanks to integrated mounting bracket (432)



Mounting holes integrated into the product rim allow easy mounting without having to remove the lens (430)

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:



	Base mounting (430)	Wall mounting (432)
Dimensions (Ø x Height):	146 mm x 171 mm	134 mm x 235 mm
Housing:	PC/ABS-Blend, black	PC/ABS-Blend, grey
Lens:	PC, transparent	
Connection:	Screw terminal 0.5-1.5 mm <sup>2</sup>	
Cable entry:	Cable diameter max. 13 mm	
Tone type and frequency:	32 tones adjustable, see table on page 224	
Life duration:	Up to 50,000 hrs (LED), up to 5,000 hrs (Multi-tone Sounder)	
Installation position:	Sound outlet facing downwards	
Fixing:	Base mounting (430), Wall mounting (432) Tube mounting (accessory, only for 430)	
Voltage:	24 V AC/DC	115-230 V AC*
Current consumption MTS:	190 mA	55 mA
Current consumption LED:	350 mA 230 mA (red)	100 mA 80 mA (red)
<b>Base mounting</b>		
red	<b>430 100 75</b>	<b>430 100 60</b>
yellow	<b>430 300 75</b>	<b>430 300 60</b>
<b>Wall mounting</b>		
red	<b>432 100 75</b>	<b>432 100 60</b>
yellow	<b>432 300 75</b>	<b>432 300 60</b>

\*Current consumption at 115 V

## ✂ ACCESSORIES:

Adaptor for tube mounting, plastic, for tube Ø 25 mm	<b>975 430 01</b>
--	-------------------

## ↔ TECHNICAL DIAGRAMS:

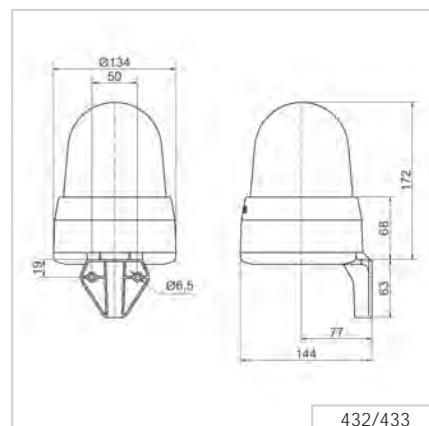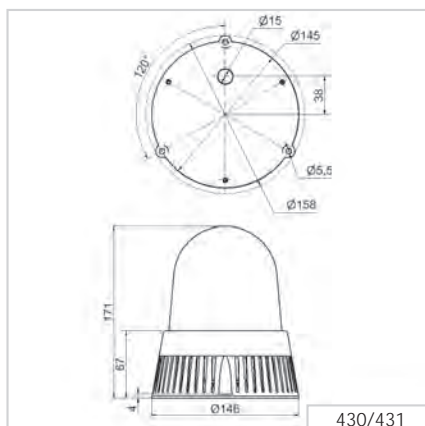

## Signalisation index

Multi-Tone Sounder	7
LED Permanent Light	5

