

442 Xenon Flash / Multi-Tone Sounder Combination (120 dB)




① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (L x H x W):	168 mm x 211 mm x 155 mm		
Housing:	PC/ABS-Blend		
Connection:	Screw terminal 0.28-2.5 mm ²		
Cable entry:	Cable gland M20 x 1.5 mm (not included in assembly)		
Tone type and frequency:	Selectable via DIP switch, 3 tones externally triggered see table on page 235		
Voltage:	18-30 V DC	115/230 V AC	
Current cons. Multi Tone Sounder:	450 mA	130/65 mA	
Current consumption Flash:	127-389 mA (dependent on voltage and flash frequency)	- /15 mA (dependent on voltage and flash frequency)	
Flash frequency	0.75 Hz/1 Hz	1.25 Hz/2 Hz	1 Hz (Flash can only be operated with 230 V)
Flash energy	3.5 Ws	2 Ws	2 Ws
Housing/Flash			
red / red	442 010 55	442 010 68	
red / yellow	442 030 55	442 030 68	
grey / red	442 110 55	442 110 68	
grey / yellow	442 130 55	442 130 68	

✂ ACCESSORIES:

Cable gland M20 x 1.5 mm (for cable strain relief)	975 444 01
Protection rating IP 65 is guaranteed even without cable gland	

↔ TECHNICAL DIAGRAMS:

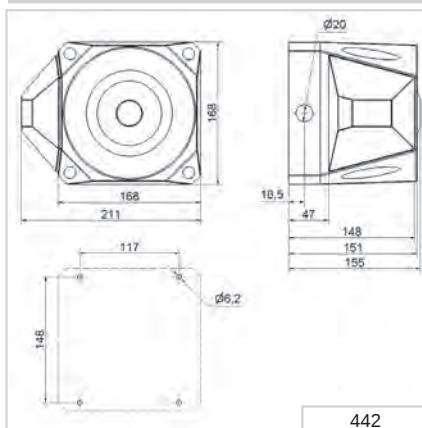

Signalisation index

Multi-Tone Sounder	10
Xenon Flash	5-6

442 XX0 55

442 XX0 68

