

## 450 LED Permanent Light/Buzzer Combination with acknowledgement function



LED Permanent light with continuous tone that can be additionally activated




① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:			
Dimensions (Ø x Height):	50 mm x 22 mm (Protrusion from panel)		
Housing:	PC/ABS-Blend		
Lens:	PC, transparent		
Connection:	Screw terminal 1.5 mm <sup>2</sup>		
Signal input:	24 V DC		
Acknowledgement	Semiconductor-	$U_{\text{max}} = 30 \text{ V}$	
output:	Relay	$I_{\text{max}} = 100  \text{mA}$	
		$R_{ON max} = 25 Ohm$	
Tone type:	Continuous		
Tone frequency:	c. 2.8 kHz		
Duty cycle:	100 %		
Life duration:	Up to 50,000 hrs		
Fixing:	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm)		
Nut and seal included in assembly.			
Voltage:	24 V DC		
Current consumption:	80 mA		
red	450 100 55		
yellow	450 300 55		


## **ADDITIONAL INFORMATION:**




The audible signal can be turned off in seconds by lightly pressing the front of the product

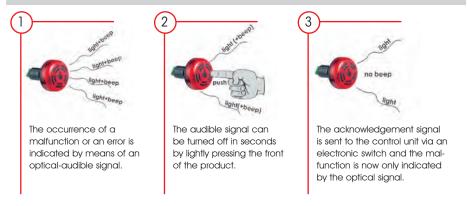

## **↔ TECHNICAL DIAGRAM:**





Siganlisation index			
Continuous tone	3		
LED Permanent Light	3		













