




750 Ex Signal Horn



① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:						
Dimensions (L x H x W):	148 mm x 350 mm x 152 mm					
Housing:	PC/ABS-Blend					
Connection:	Cable 3 m, 2 x 0.75 mm ²					
Fixing:	Bracket mounting, sound outlet facing downwards					
Explosion protection:	Ex II 2G Ex mb IIC T5 Gb					
Approval:	BVS 03 ATEX E 118X					
Voltage:	24 V DC	24 V AC	42-48 V AC	115 V AC	230 V AC	
Voltage:	21.6 V ... 26.4 V	21.6 V ... 26.4 V	37.8 V ... 52.8 V	102.5 V ... 126.5 V (50 Hz)	108 V ... 131 V (60 Hz)	208 V ... 250 V (50 Hz)
Current consumption:	350 mA	450 mA	220 mA	205 mA	70 mA	
Order No.:	750 000 55	750 000 65	750 000 66	750 000 67	750 000 68	

↔ TECHNICAL DIAGRAM:

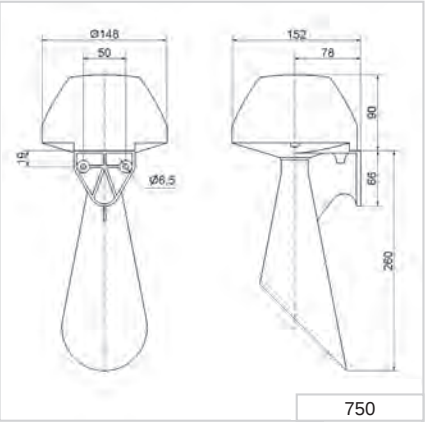

Signalisation index	
Horn	6

2 G

Zone 1 + 2

1,3

kg

+50°C

-40°C