

# 800 Installation Permanent Beacon - PG29 (Ø 37 mm)



Bulb change via rear access with bayonet holder



Accessories


## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	57 mm x 54 mm (Protrusion from panel)
Housing:	PC/ABS-Blend Socket: PA-GF, high impact
Lens:	PC, transparent
Connection:	Screw terminal 0.5 -1.5 mm²
Fixing:	Installation mounting for Ø 37 mm (PG29)
Operating voltage:	12-230 V
Bulb socket:	BA15d, 5 Watt max.
Bulb change:	Via rear access with bayonet mechanism
Bulb not included in assembly.	
Voltage:	12-230 V
red	<b>800 100 00</b>
green	<b>800 200 00</b>
yellow	<b>800 300 00</b>
white	<b>800 400 00</b>
blue	<b>800 500 00</b>

## ✂ ACCESSORIES:

Bulb BA15d, 5 W total length 42 mm					
<b>Voltage:</b>	12 V AC/DC	24 V AC/DC	30 V AC/DC	115 V AC/DC	230 V AC/DC
	<b>955 840 34</b>	<b>955 840 35</b>	<b>955 840 32</b>	<b>955 840 57</b>	<b>955 840 38</b>
Tube adaptor	<b>975 812 01</b>				
Base with integrated tube, Ø 25 mm, 110 mm long, plastic	<b>975 840 10</b>				
Base for tube mounting	<b>975 840 90</b>				
Base for base mounting	<b>975 812 02</b>				
Tube Ø 25 mm, all anodised aluminium					
100 mm long	<b>975 845 10</b>				
250 mm long	<b>975 840 25</b>				
400 mm long	<b>975 840 40</b>				
Anti-twist device	<b>975 815 22</b>				
Surface housing IP 65					
for 1 Installation Beacon	<b>975 815 03</b>				
for 2 Installation Beacons	<b>975 815 07</b>				
for 3 Installation Beacons	<b>975 815 08</b>				
for 4 Installation Beacons	<b>975 109 05</b>				

## ↔ TECHNICAL DIAGRAM:

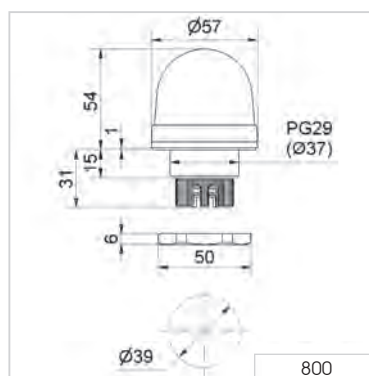

### Signalisation index

Permanent Light   2

