

816 LED Installation Permanent Beacon - PG29 (Ø 37 mm)



Tube adaptor as accessory



Surface housing as accessory


① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

| | | | |
|--------------------------|---|-------------------|-------------------|
| Dimensions (Ø x Height): | 75 mm x 66 mm (Protrusion from panel) | | |
| Housing: | PC/ABS-Blend Socket: PA-GF, high impact | | |
| Lens: | PC, transparent Shock resistance 20 Joules according to EN 60079-0 | | |
| Fixing: | Installation mounting for Ø 37 mm (PG29) | | |
| Connection: | Screw terminal 0.5 - 1.5 mm ² | | |
| Life duration: | Up to 100,000 hrs | | |
| Voltage: | 24 V AC/DC | 115 V AC | 230 V AC |
| Current consumption: | 45 mA | 25 mA | 25 mA |
| red | 816 100 55 | 816 100 67 | 816 100 68 |
| green | 816 200 55 | 816 200 67 | 816 200 68 |
| yellow | 816 300 55 | 816 300 67 | 816 300 68 |
| clear | 816 400 55 | 816 400 67 | 816 400 68 |


✳ ACCESSORIES:

| | |
|--|-------------------|
| Tube adaptor | 975 812 01 |
| Base with integrated tube, Ø 25 mm, 110 mm long, plastic | 975 840 10 |
| Base for tube mounting | 975 840 90 |
| Base for base mounting | 975 812 02 |
| Tube Ø 25 mm, all anodised aluminium | |
| 100 mm long | 975 845 10 |
| 250 mm long | 975 840 25 |
| 400 mm long | 975 840 40 |
| Anti-twist device | 975 815 22 |
| Surface housing IP 65 | |
| for 1 Installation Beacon | 975 815 03 |
| for 2 Installation Beacons | 975 815 07 |
| for 3 Installation Beacons | 975 815 08 |
| for 4 Installation Beacons | 975 109 05 |
| Accessories see page 98 | |


↔ TECHNICAL DIAGRAM:

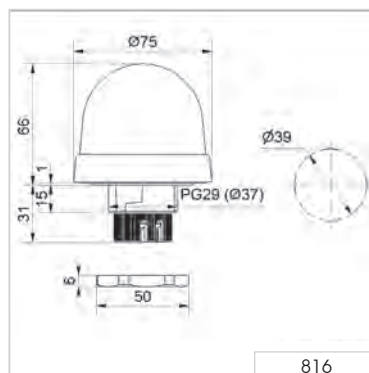

| Signalisation index | | |
|---------------------|---|---|
| LED Permanent Light | | 3 |



24 V



816 LED Installation Blinking Beacon - PG29 (Ø 37 mm)



Tube adaptor as accessory



Surface housing (accessory)


① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

| | |
|--|---|
| Dimensions (Ø x Height): | 75 mm x 66 mm (Protrusion from panel) |
| Housing: | PC/ABS-Blend Socket: PA-GF, high impact |
| Lens: | PC, transparent Shock resistance 20 Joules according to EN 60079-0 |
| Fixing: | Installation mounting for Ø 37 mm (PG29) |
| Connection: | Screw terminal 0.5 - 1.5 mm ² |
| Blink frequency: | C. 1 Hz |
| Life duration: | Up to 50,000 hrs |
| Voltage: | 24 V AC/DC |
| Current consumption: | 45 mA |
| red | 816 110 55 |
| yellow | 816 310 55 |
| Further colours and voltages on request. | |

✂ ACCESSORIES:

| | |
|--|-------------------|
| Tube adaptor | 975 812 01 |
| Base with integrated tube, Ø 25 mm, 110 mm long, plastic | 975 840 10 |
| Base for tube mounting | 975 840 90 |
| Base for base mounting | 975 812 02 |
| Tube Ø 25 mm, all anodised aluminium | |
| 100 mm long | 975 845 10 |
| 250 mm long | 975 840 25 |
| 400 mm long | 975 840 40 |
| Anti-twist device | 975 815 22 |
| Surface housing IP 65 | |
| for 1 Installation Beacon | 975 815 03 |
| for 2 Installation Beacons | 975 815 07 |
| for 3 Installation Beacons | 975 815 08 |
| for 4 Installation Beacons | 975 109 05 |
| Accessories see page 98 | |


↔ TECHNICAL DIAGRAM:

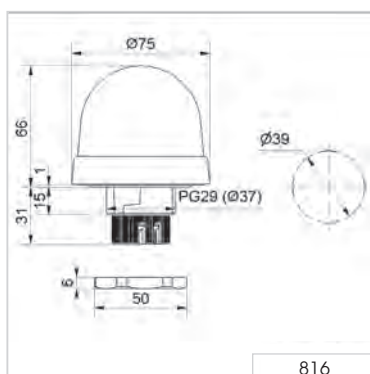

816

Signalisation index

LED Blinking Light 3



PLC