

# Quick-Finder EvoSIGNAL Midi - Horns & Sirens



**12/24 V AC/DC**

161 700 70

**115-230 V AC**

161 700 60

**+ Mounting adapter (compulsory!)**

Base mounting



Order no.  
261 700 01

Base mounting  
with cable gland




Order no.  
261 700 02

Tube mounting



Order no.  
261 700 05

Bracket mounting  
with cable gland



Order no.  
261 700 06

Bracket mounting









Order no.  
261 700 07

Horn



Order no.  
261 700 03

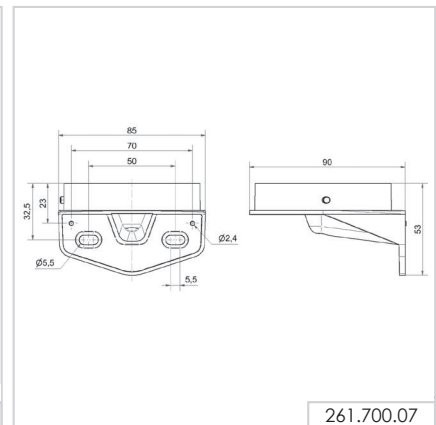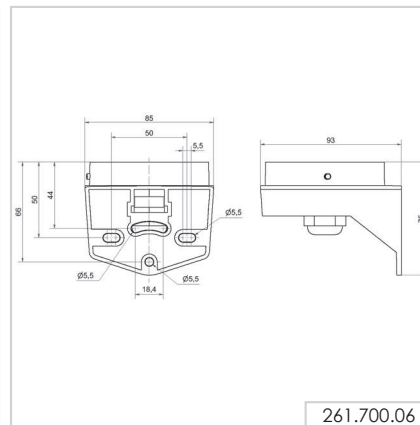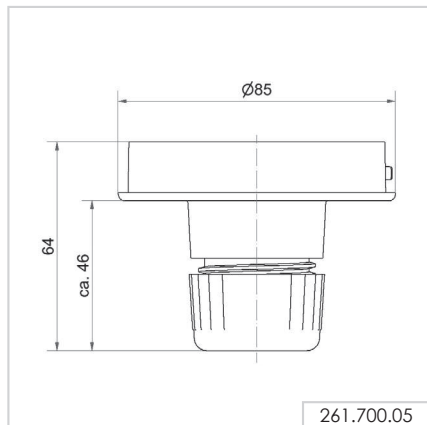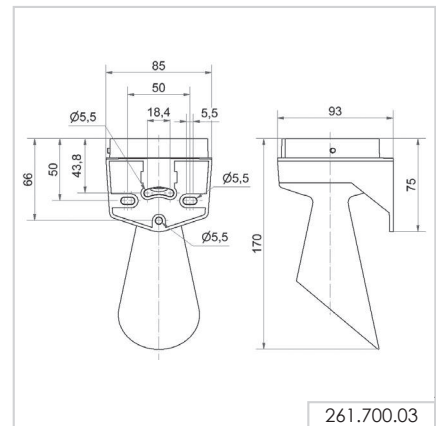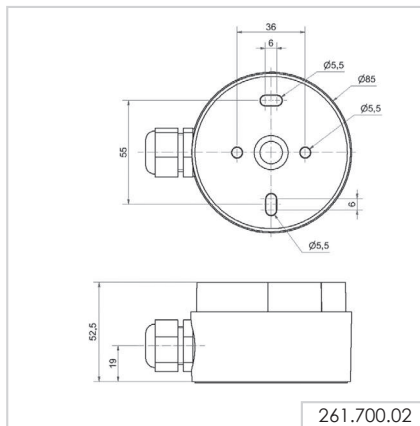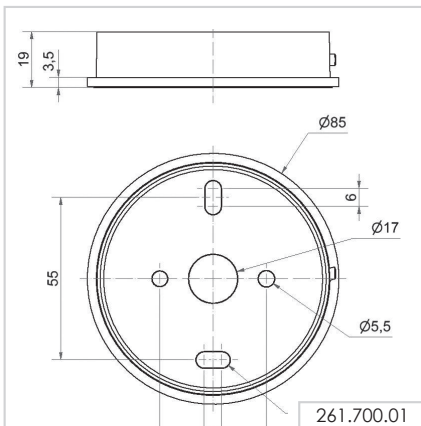


# EvoSIGNAL Midi - Horns & Sirens



Base mounting



Tube mounting



Bracket mounting

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS

Dimensions (Ø x Height): 85 mm x 78 mm		
Housing:	PC/ABS	
Lens:	PC, grey	
Fixing:	Base/Tube/Wall mounting	
Cable entry:	Cable diameter 8-12 mm	
Connection:	Pusch-In terminal max. 1.5 mm <sup>2</sup>	
Tone type:	Multi-tone	
Tone frequency:	3300 Hz	
Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 175 mA	≤ 105 mA
Order no.	<b>161 700 70</b>	<b>161 700 60</b>

## ♪ TONE TYPES AND FREQUENCIES




10 selectable tones and adjustable sound output

Tone	Tone type
0	Horn tone (ca. 110 Hz), max. 107 dB(A)
1	Continuous tone (ca. 3.3 kHz), max. 106 dB(A)
2	Pulse tone 1 Hz (ca. 3.3 kHz), max. 110 dB(A)
3	Whistle tone 20 Hz (ca. 3.3 kHz), max. 110 dB(A)
4	800 – 970 Hz rising @ 1 Hz, max. 95 dB(A)
5	2400 - 2850 Hz rising @ 7 Hz, max. 99 dB(A)
6	1200 – 500 Hz falling @ 1 Hz, max. 101 dB(A)
7	Alternating tone 800 Hz / 1200 Hz @ 1 Hz, max. 100 dB(A)
8	Sweep-Tone 2100 – 4100 Hz @ 0.5 Hz, max. 110 dB(A)
9	Continuous tone (c. 700 Hz), max. 97 dB(A)

## ✂ ACCESSORIES:

Base mounting	<b>261 700 01</b>
Base mounting with cable gland	<b>261 700 02</b>
Tube mounting	<b>261 700 05</b>
Bracket mounting	<b>261 700 07</b>
Bracket mounting with cable gland	<b>261 700 06</b>
Horn	<b>261 700 03</b>

## ↔ TECHNICAL DIAGRAM

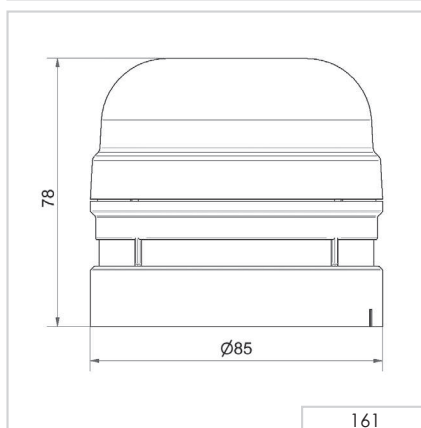



261.700.02

261.700.05

261.700.06

261.700.07

261.700.03



### Signalisation index

Midi 8

